


105/3 ^{13MM} FLOOR CHANNEL

ON FLOOR / RECESSED / SUB FLOOR INSTALLATION

REFER NEXT PAGE



105.13.38

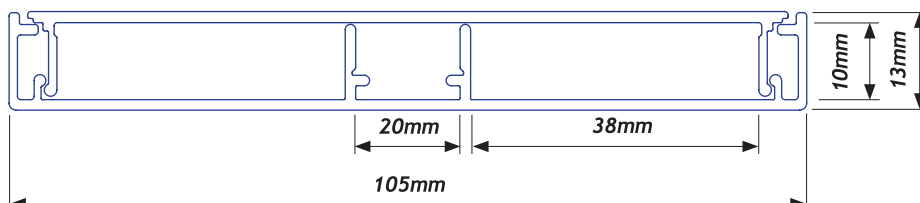

PROFILE LENGTHS

PART No.

 3.0 metres
Includes covers

105.13.383

SINGLE & DOUBLE CHANNEL CONFIGURATIONS

105.13.18



105.13.28



FINISHING PRODUCTS*

JOINER

PART No.

 Joiner PAIR
Earthing Plate

105.13.381

ENDS

PART No.

 90° End Channel Vertical
90° End Cap

105.13.387

105.13.382

FLAT BEND**

PART No.

Flat Bend

105.13.384

TEE JUNCTIONS

PART No.

 90° Tee Junction Vertical
Flat Tee Junction

105.13.388

105.13.385

CROSS JUNCTION

PART No.

4 Way Junction

105.13.386

****When using bends consideration must be given to the cross sectional diameter of the conductors chosen, in particular flat TPS cabling.**


 COMPLIANCE: AS/NZS 3000
FIRE HAZARD: AS1530 PT3 1999
SEALING: AS 60529-2004

 *IMAGES ARE NOT TO
SCALE / PROPORTION

Contact Interserv to discuss your needs.



0800 828 914

15 Patiki Road, Avondale, Auckland, NZ


www.interserv.co.nz

ON FLOOR


Endcap MDF wedge



MDF WEDGE

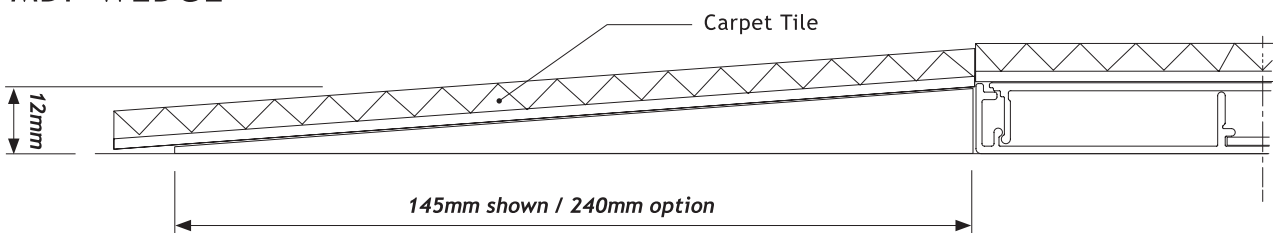


RECESSED

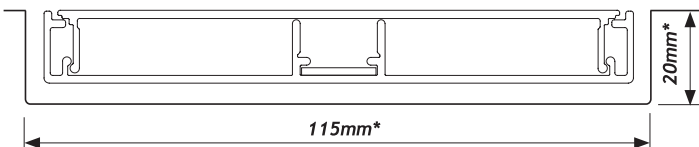

**Recess and Sub-floor channel depth and width will be subject to the accuracy of your channelling technique*

SUB FLOOR

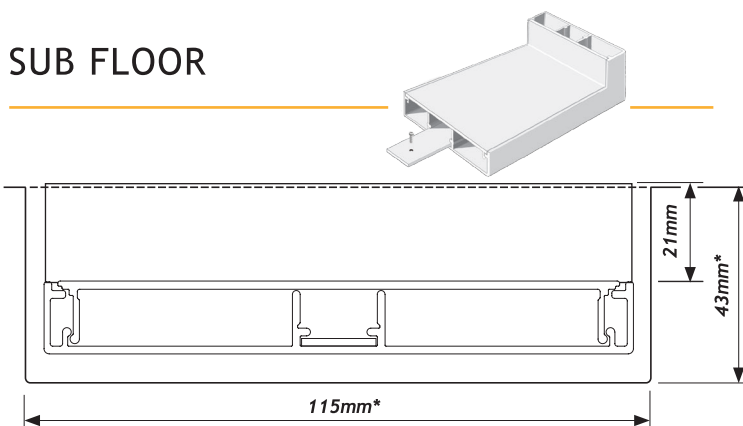

Sample of data and powerpoint configurations.
Contact Interserv for your particular requirements.