


CAT 6A 145/2E

EXTENDED
COLUMN PROFILE

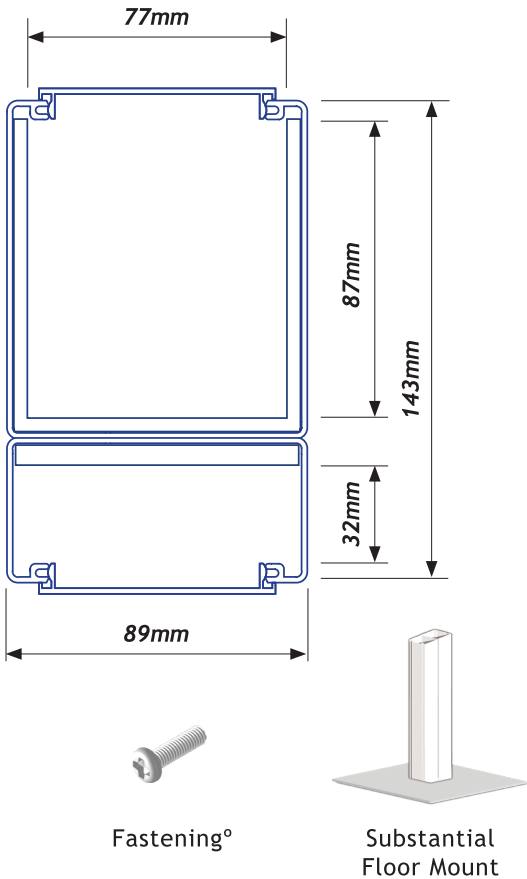

PROFILE LENGTHS †	PART No.
3.1 metre	CAT 6A 145.2236
6.2 metre	CAT 6A 145.2266
Includes covers + One floor mount*	

† Bespoke column height options available.
12 metres recommended maximum height.
Contact Interserv to discuss your particular needs.

ACCESSORIES*

FLOOR MOUNT	PART No.
Floor Mounting Bracket	10.0090
*One floor mount supplied Additional floor mounts can be purchased separately	



FIXING PLATES	PART No.
70mm Large Outlet PAIR	70.0040



COMPRESSION JACKS	PART No.
300mm	15.3000
600mm	15.6000



FINISHING FLANGE	PART No.
PVC Ceiling Flange	145.2256



° Lid fastenings used on secondary column section lids for safety.
Fastenings can be colour matched.
Security puzzle screws available.



COMPLIANCE: AS/NZS 3000
FIRE HAZARD: AS1530 PT3 1999
SEALING: AS 60529-2004

*IMAGES ARE NOT TO
SCALE / PROPORTION

0800 828 914
15 Patiki Road, Avondale, Auckland, NZ

www.interserv.co.nz