



CAT 6 120/2E

EXTENDED
COLUMN PROFILE

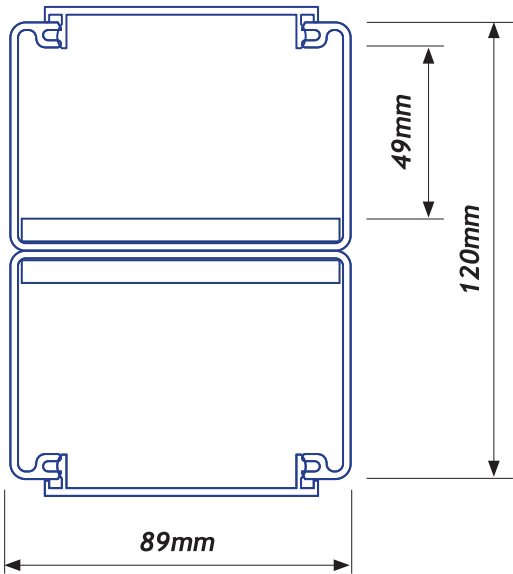

Fastening°



Substantial
Floor Mount

† Bespoke column height options available.
9 metres recommended maximum height.
Contact Interserv to discuss your particular needs.



PROFILE LENGTHS †	PART No.
3.1 metre	CAT 6 120.2236
6.2 metre	CAT 6 120.2266
Includes covers + floor mount	

ACCESSORIES*

FLOOR MOUNT	PART No.
-------------	----------

Floor Mounting Bracket 10.0090
*One floor mount supplied
Additional floor mounts can be purchased separately



FIXING PLATES	PART No.
---------------	----------

70mm Large Outlet PAIR 70.0040



COMPRESSION JACKS	PART No.
-------------------	----------

300mm 15.3000
600mm 15.6000



FINISHING FLANGE	PART No.
------------------	----------

PVC Ceiling Flange 120.2256



° Lid fastenings used on secondary column section lids for safety.
Fastenings can be colour matched.
Security puzzle screws available.



COMPLIANCE: AS/NZS 3000
FIRE HAZARD: AS1530 PT3 1999
SEALING: AS 60529-2004

*IMAGES ARE NOT TO
SCALE / PROPORTION

0800 828 914

15 Patiki Road, Avondale, Auckland, NZ

www.interserv.co.nz