

STANDARD
SKIRTING TRUNKING PROFILE
C6/115/2



Internal
Corners
115.2306




External
Corners
115.2316



External Corner
- Covers Only
115.2326

Profile Lengths includes Covers
3m - 115.2136
6m - 115.2166

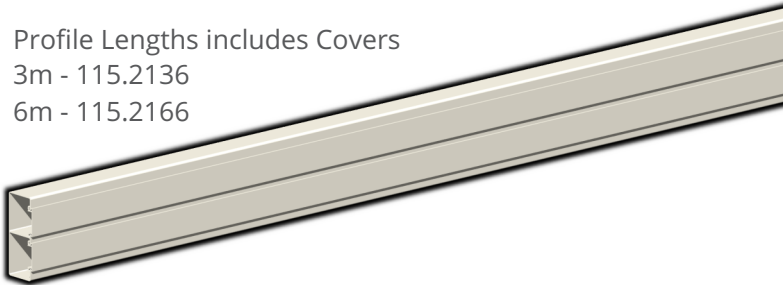

Flat T Intersection
Data left
156.2506



Flat T Intersection
Data right
115.2516




Flat Bend
Data External
115.2416



Flat Bend
Data Internal
115.2406



Power and Data
Fixing Plates
38.0040
Supplied in pairs




Joining Pieces
Rivet or screw fix
Supplied in pairs
10.0000



45 Degree End Caps
Left Ending - 115.2606
Right Ending - 115.2616



90 Degree End Cap
Right and Left Ending.
Rivet or screw fix to
profiles. 115.0626

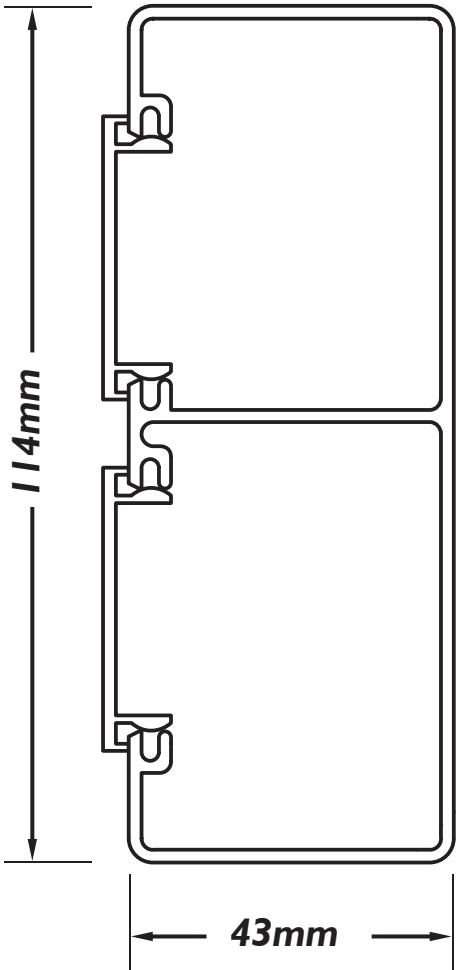

Pillar Units (see Pillar Surrounds Page 81)
Site dimensions required, Corner cover pieces
included
Two Sides - 115.2626
Three Sides - 115.2636
Four Sides - 115.2646. Fabricated in two parts
includes Joiners and provision for dropper feeds.