


CAT 6 CAPABLE
SKIRTING TRUNKING PROFILE


CAT6/150/2




Internal Corners 150.2306
External Corners 150.2316
External Corner - Covers Only 150.2326

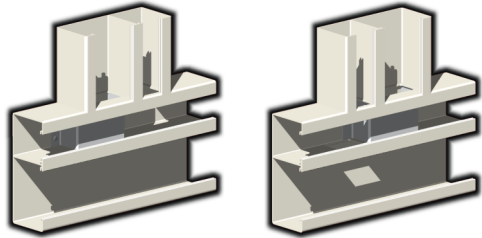

Flat T Intersection Data left 150.2506
Flat T Intersection Data right 150.2516

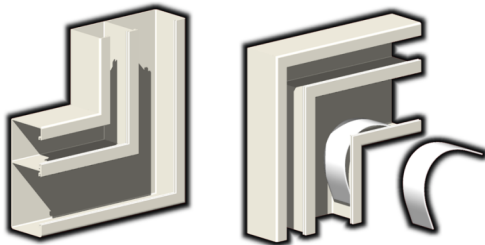

Flat Bend Data External 150.2416
Flat Bend Data Internal Includes PVC Rider 150.2406

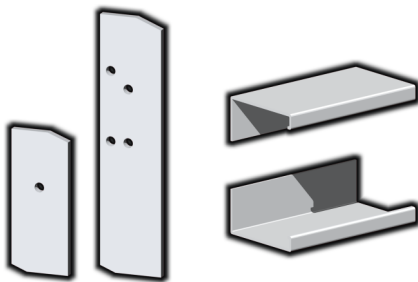

Power and Data Fixing Plates
Upper power channel - 38.0040
Lower data channel - 70.0040
Supplied in pairs

Joining Pieces
Rivet or screw fix
Supplied in pairs
10.0106





45 Degree End Caps
Left Ending - 150.2606
Right Ending - 150.2616



90 Degree End Cap
Right and Left Ending.
Rivet or screw fix to
profiles. 150.0626

Profile Lengths includes Covers
3m - 150.2136
6m - 150.2166

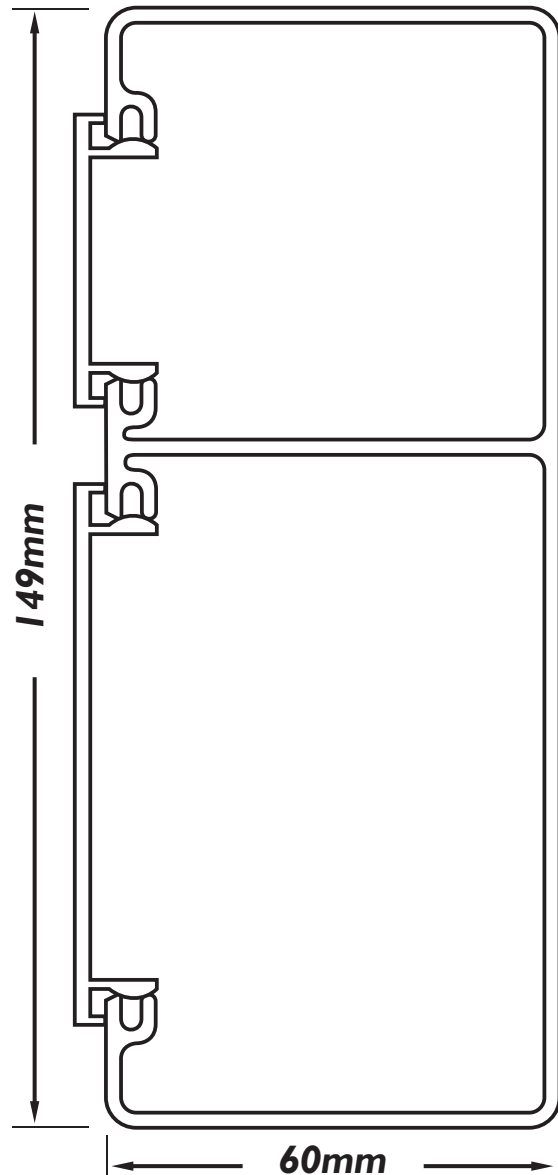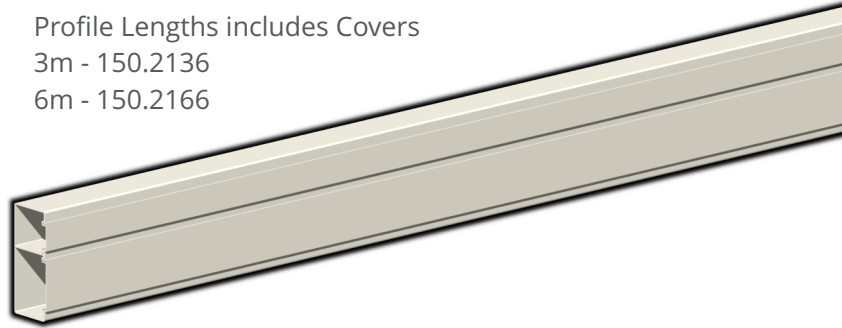

Pillar Units (see Pillar Surrounds Page 81)
Site dimensions required, Corner cover pieces included
Two Sides - 150.2626
Three Sides - 150.2636
Four Sides - 150.2646. Fabricated in two parts includes Joiners and provision for dropper feeds.