

STANDARD  
SKIRTING TRUNKING PROFILE  
**C6/115/2**



Internal  
Corners  
115.2306



External  
Corners  
115.2316




External Corner  
- Covers Only  
115.2326

Profile Lengths includes Covers

3m - 115.2136

6m - 115.2166

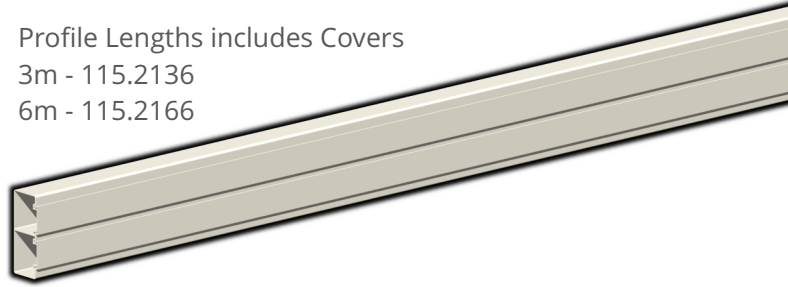

Flat T Intersection  
Data left  
115.2506




Flat T Intersection  
Data right  
115.2516




Flat Bend  
Data External  
115.2316



Flat Bend  
Data Internal  
115.2306

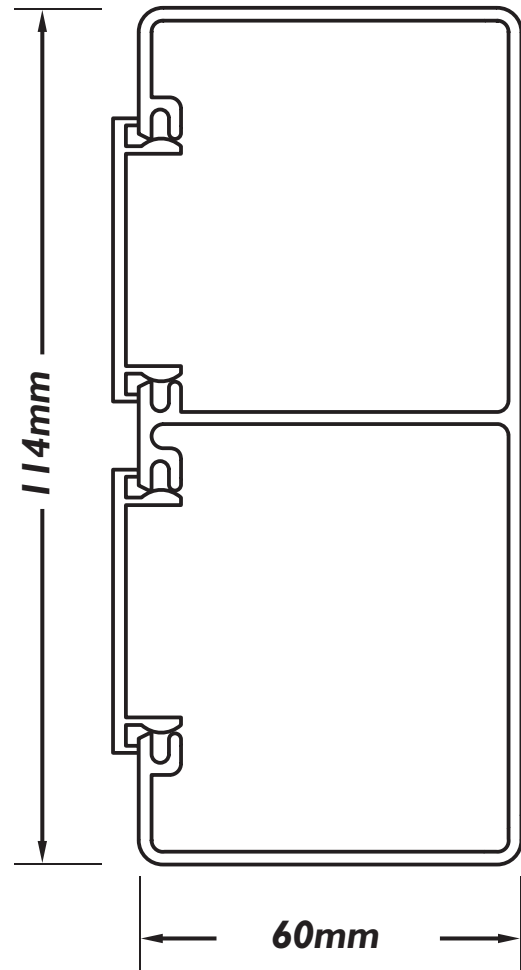

Power and Data  
Fixing Plates  
38.0040  
Supplied in pairs



Joining Pieces  
Rivet or screw fix  
Supplied in pairs  
10.0106



45 Degree End Caps  
Left Ending - 115.2606  
Right Ending - 115.2616



90 Degree End Cap  
Right and Left Ending.  
Rivet or screw fix to  
profiles. 115.0626

Pillar Units

Site dimensions required, Corner cover pieces included

Two Sides - 115.2626

Three Sides - 115.2636

Four Sides - 115.2646. Fabricated in two parts includes Joiners and provision for dropper feeds.