

STANDARD  
SKIRTING TRUNKING PROFILE

# 64/115/1




Internal  
Corners  
64.1300



External  
Corners  
64.1310



External Corner  
- Covers Only  
64.1320



Flat T Intersection  
Cover Plate Right  
64.1510



Flat T Intersection  
Cover Plate Left  
64.1500




Flat Bend  
Cover External  
64.1410



Flat Bend  
Cover Internal  
64.1400



Power and Data  
Fixing Plates - 70.0040  
Supplied in pairs



Joining Pieces  
Rivet or screw fix  
Supplied in pairs  
10.0000



45 Degree End Caps  
Left Ending - 64.1600  
Right Ending - 64.1610





90 Degree End Cap  
Right and Left Ending.  
Rivet or screw fix to  
profiles. 115.0620

Profile Lengths includes Covers

3m - 64.1130

6m - 64.1160

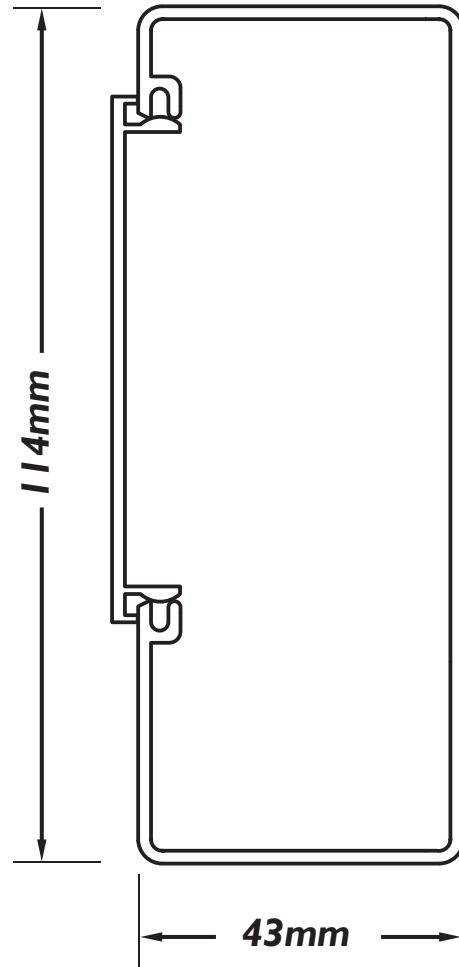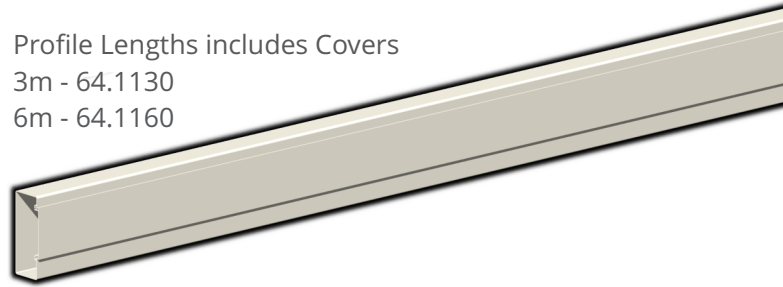

Pillar Units (see Pillar Surrounds Page 81)  
Site dimensions required, Corner cover pieces  
included

Two Sides - 64.1620

Three Sides - 64.1630

Four Sides - 64.1640. Fabricated in two parts  
includes joiners and provision for dropper feeds.