

STANDARD
SKIRTING TRUNKING PROFILE
C6/115/1



Internal
Corners
64.1300



External
Corners
64.1310



External Corner
- Covers Only
64.1320



Flat T Intersection
Cover Plate Right
64.1510



Flat T Intersection
Cover Plate Left
64.1500




Flat Bend
Cover External
64.1410



Flat Bend
Cover Internal
64.1400



Power and Data
Fixing Plates - 70.0040
Supplied in pairs



Joining Pieces
Rivet or screw fix
Supplied in pairs
10.0000



45 Degree End Caps
Left Ending - 64.1600
Right Ending - 64.1610





90 Degree End Cap
Right and Left Ending.
Rivet or screw fix to
profiles. 115.0620

Profile Lengths includes Covers

3m - 64.1130

6m - 64.1160

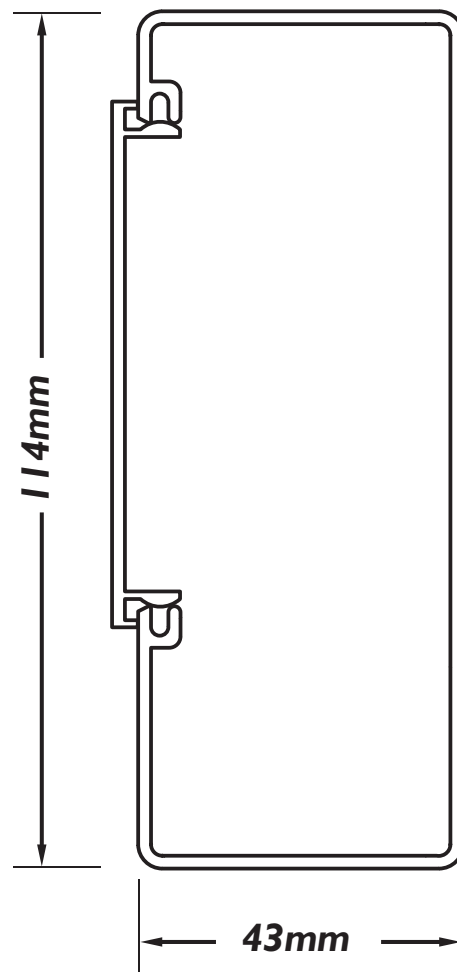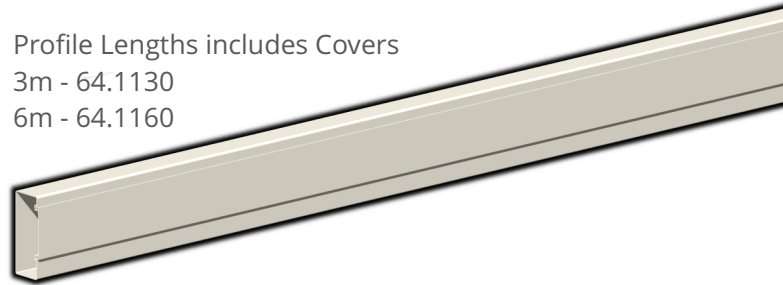

Pillar Units (see Pillar Surrounds Page 81)

Site dimensions required, Corner cover pieces included

Two Sides - 64.1620

Three Sides - 64.1630

Four Sides - 64.1640. Fabricated in two parts includes joiners and provision for dropper feeds.