


CAT 6 CAPABLE  
SKIRTING TRUNKING PROFILE


# CAT6/150/2




Internal Corners 150.2306  
External Corners 150.2316  
External Corner - Covers Only 150.2326

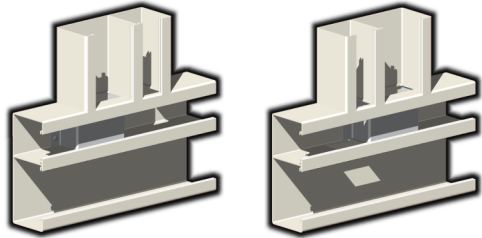

Flat T Intersection Data left 150.2506  
Flat T Intersection Data right 150.2516

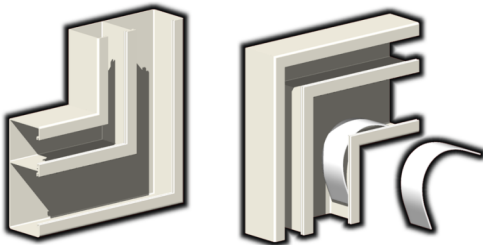


Flat Bend Data External 150.2416  
Flat Bend Data Internal Includes PVC Rider 150.2406

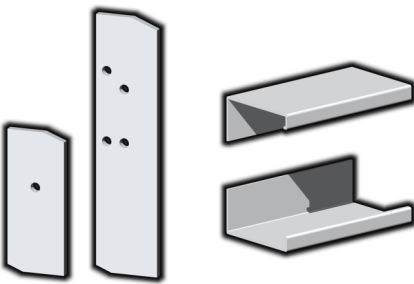

Joining Pieces  
Rivet or screw fix  
Supplied in pairs  
150.2106

Power and Data Fixing Plates  
Upper power channel - 38.0040  
Lower data channel - 70.0040  
Supplied in pairs





45 Degree End Caps  
Left Ending - 150.2606  
Right Ending - 150.2616



90 Degree End Cap  
Right and Left Ending.  
Rivet or screw fix to  
profiles. 150.0626

Profile Lengths includes Covers  
3m - 150.2136  
6m - 150.2166

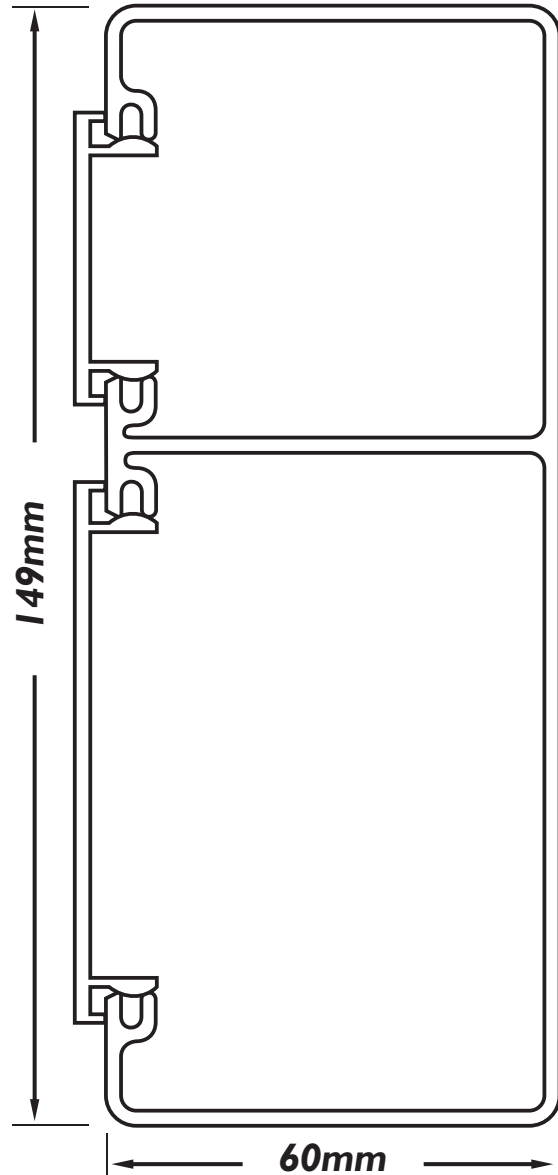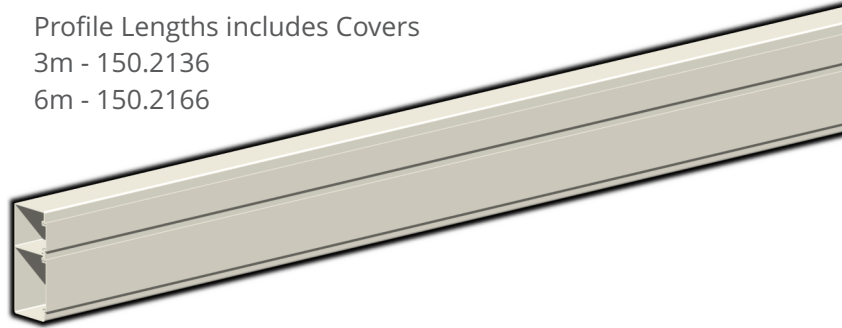

Pillar Units (see Pillar Surrounds Page 81)  
Site dimensions required, Corner cover pieces included  
Two Sides - 150.2626  
Three Sides - 150.2636  
Four Sides - 150.2646. Fabricated in two parts includes Joiners and provision for dropper feeds.