


CAT 6 CAPABLE
SKIRTING TRUNKING PROFILE
CAT6/180/2


Profile Lengths include Covers
3m - 180.2136
6m - 180.2166

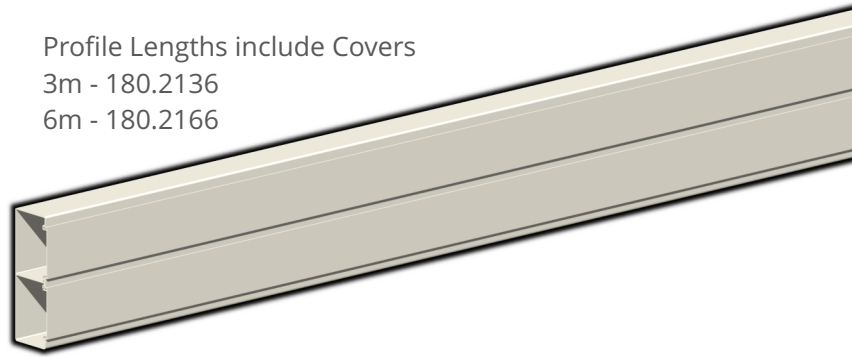


Internal
Corners
180.2306

External
Corners
180.2316


External Corner
- Covers Only
180.2326




Flat T Intersection
Data left
180.2506



Flat T Intersection
Data right
180.2516




Flat Bend
Data External
180.2416



Flat Bend
Data Internal
Includes PVC Rider
180.2406




Power and Data Fixing Plates
Upper power channel - 70.0040
Lower data channel - 70.0040
Supplied in pairs




Joining Pieces
Rivet or screw fix
Supplied in pairs
180.2106



45 Degree End Caps
Left Ending - 180.2606
Right Ending - 180.2616



90 Degree End Cap
Right and Left Ending.
Rivet or screw fix to
profiles. 180.0626

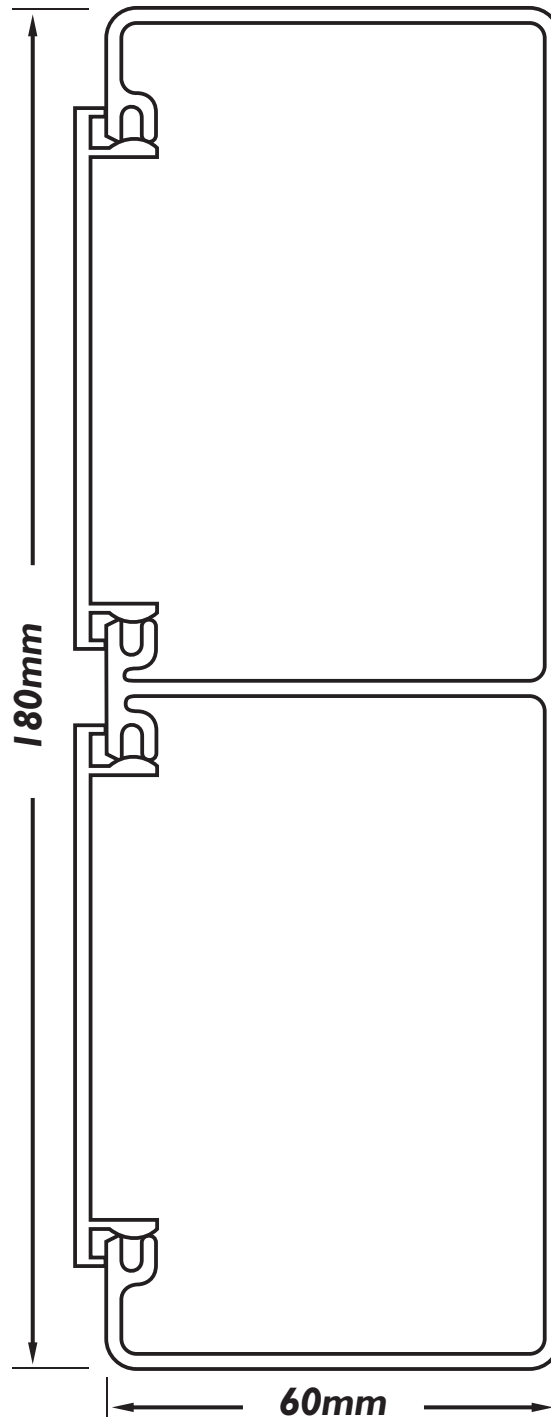

Pillar Units (see Pillar Surrounds Page 81)
Site dimensions required, Corner cover pieces included
Two Sides - 180.2626
Three Sides - 180.2636
Four Sides - 180.2646. Fabricated in two parts includes Joiners and provision for dropper feeds.